



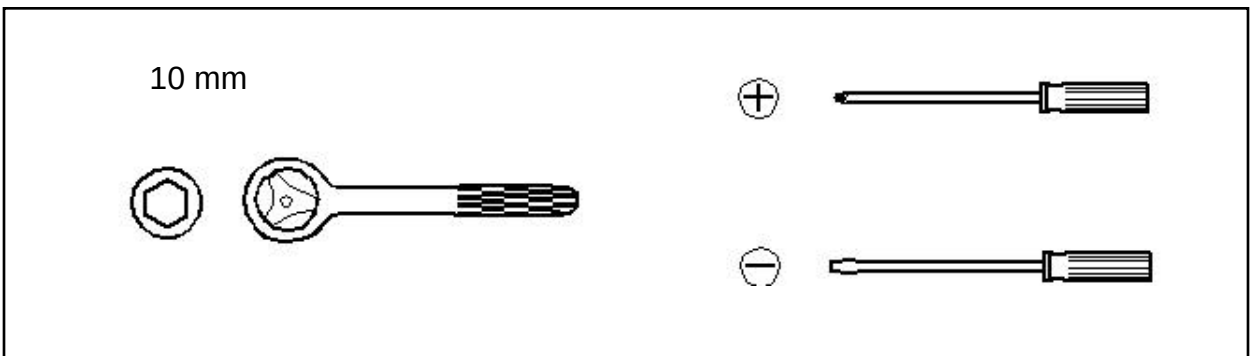
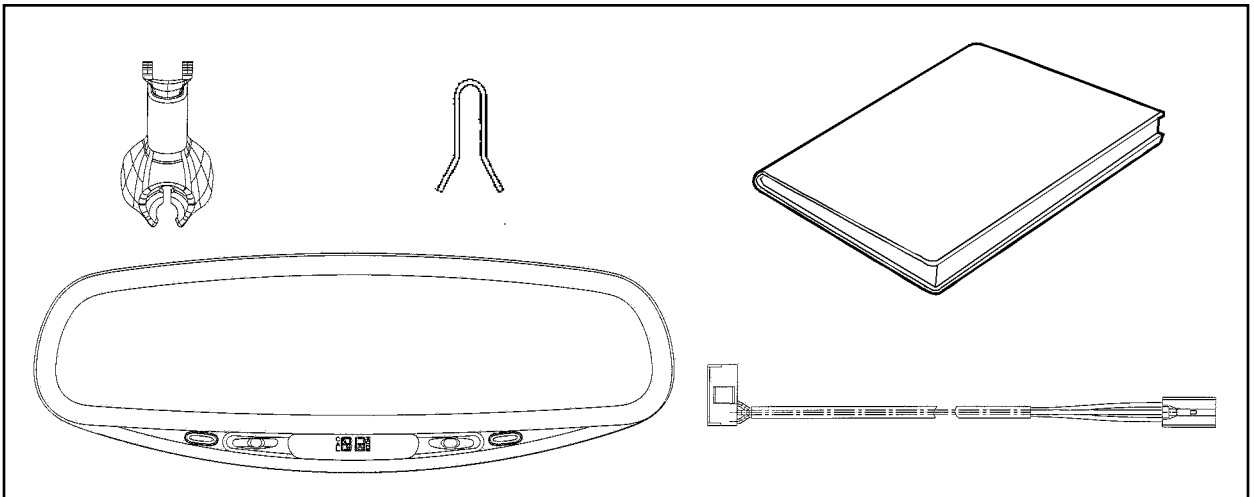
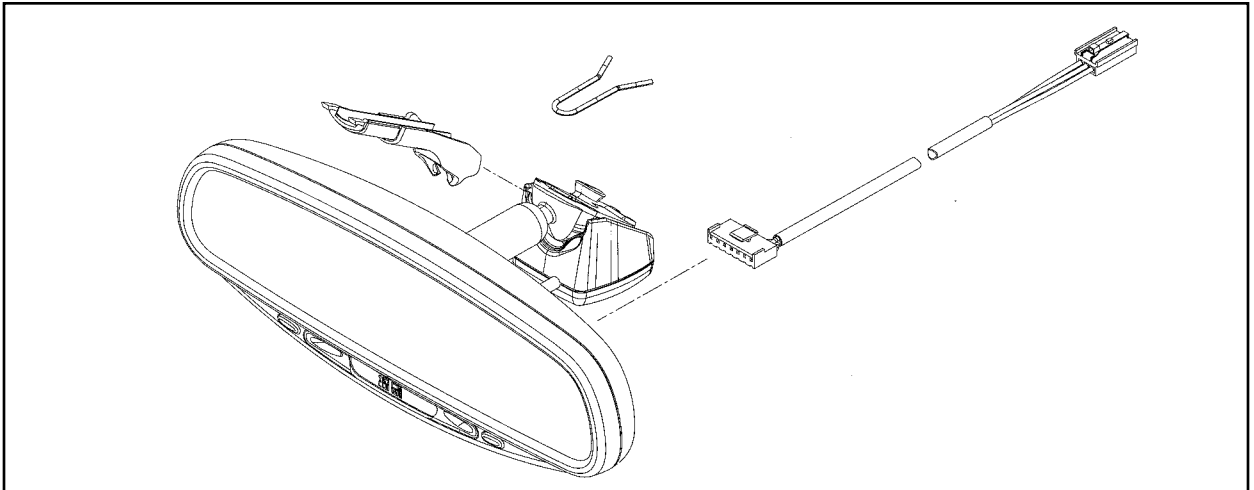
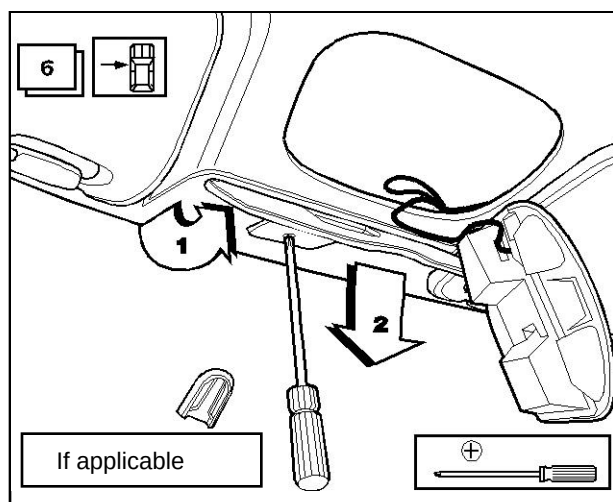
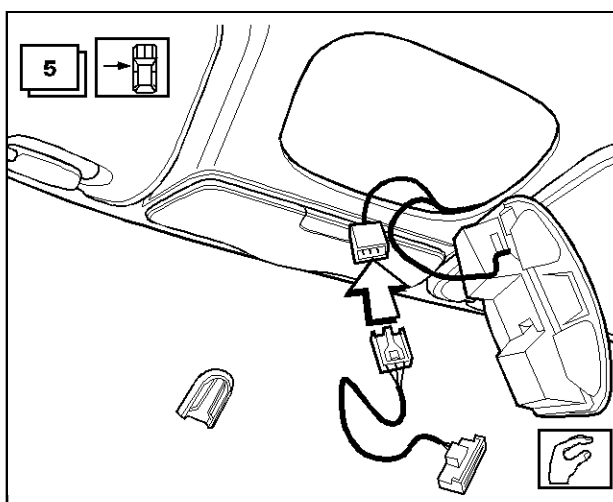
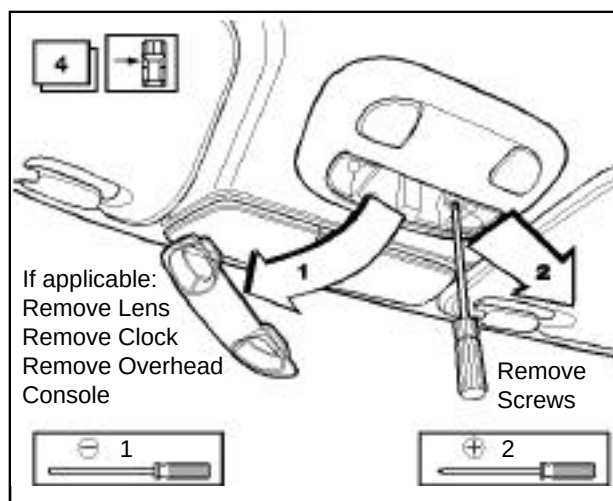
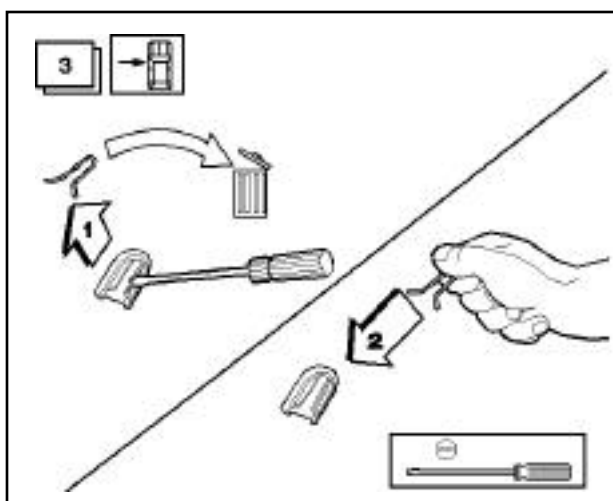
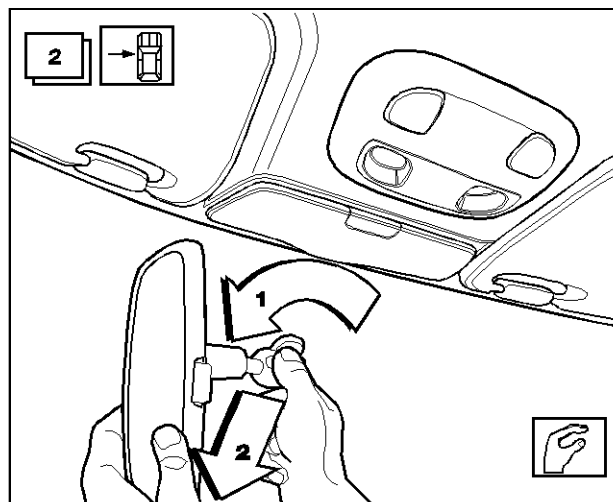
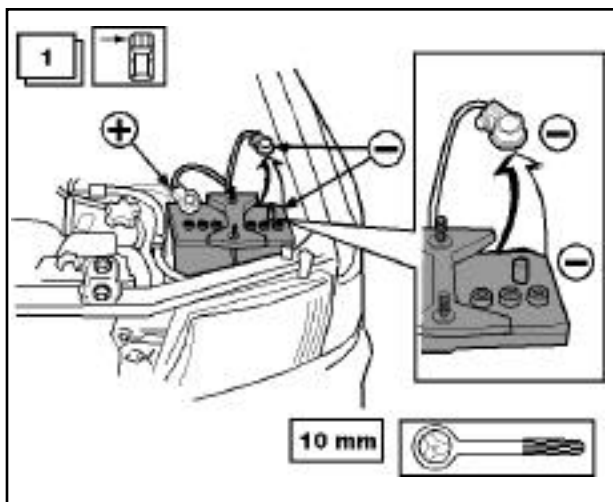
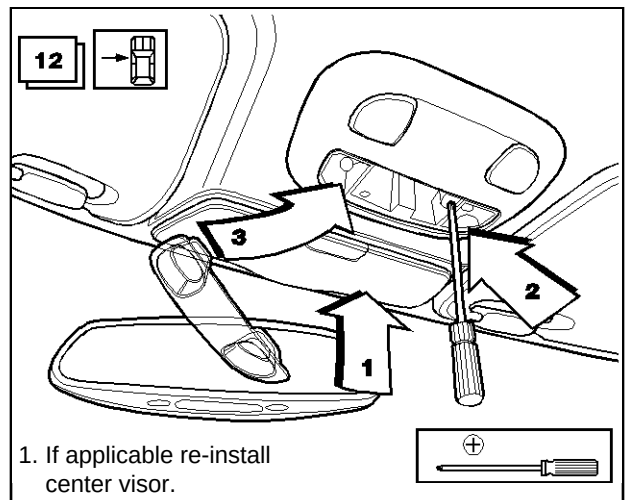
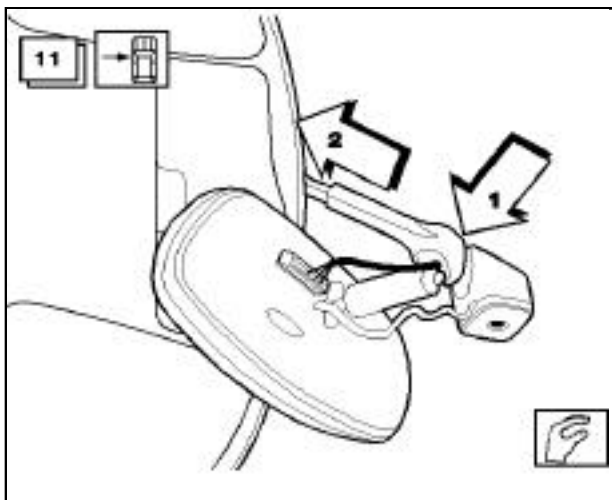






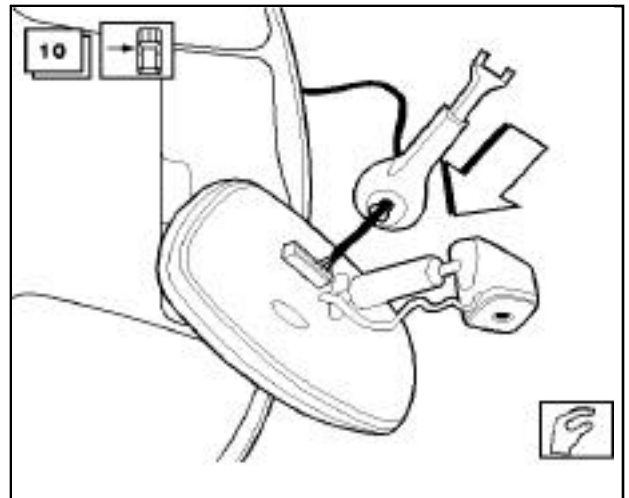


Installation Instructions For: Electrochromic Mirror
with Compass

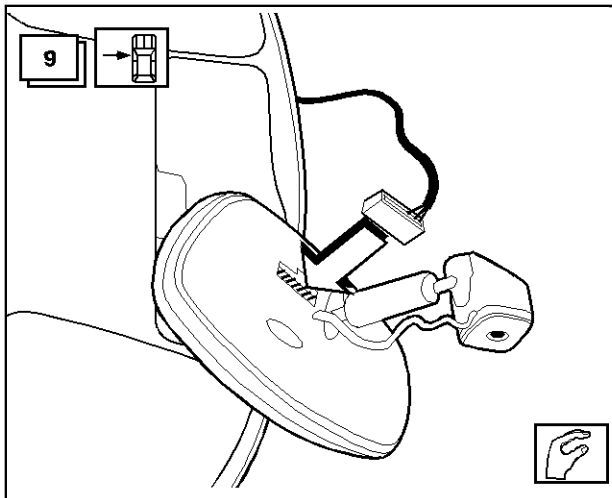

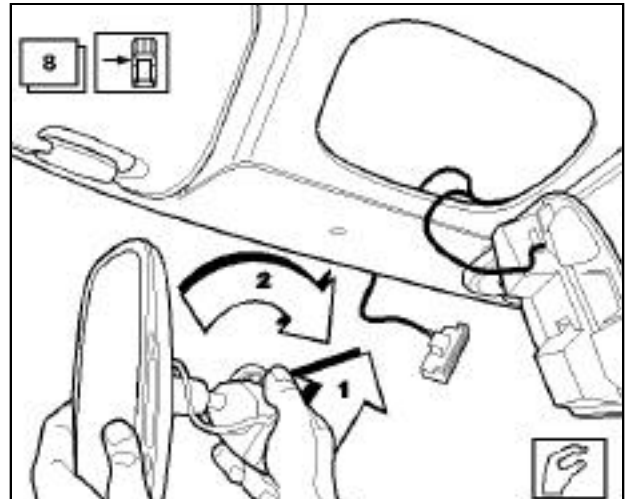

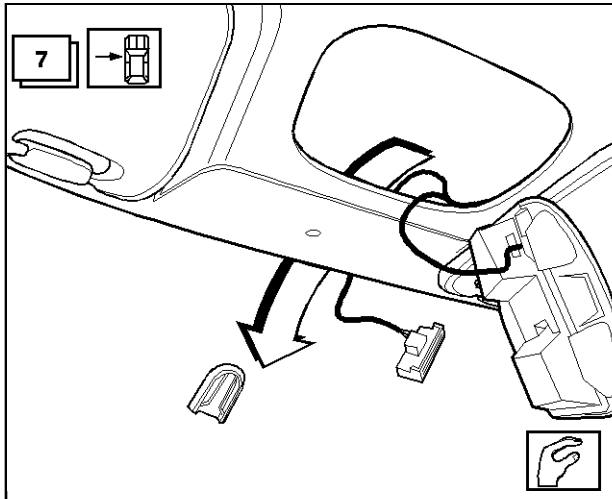

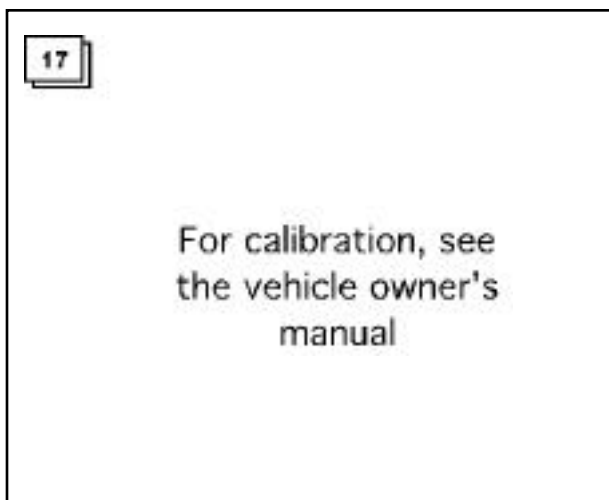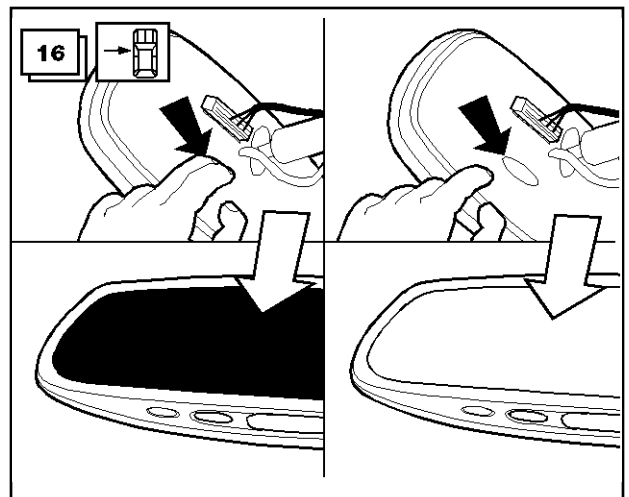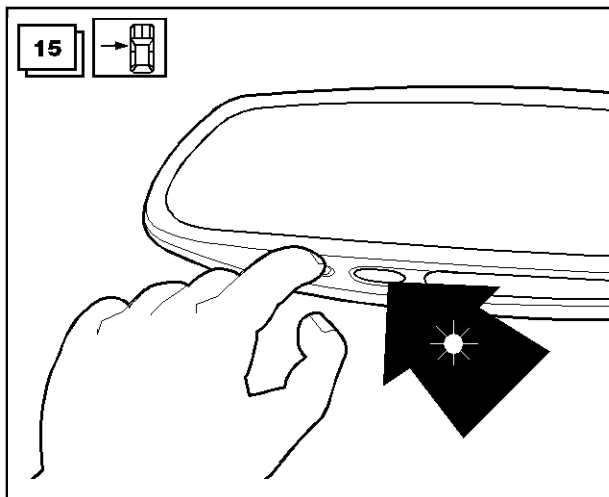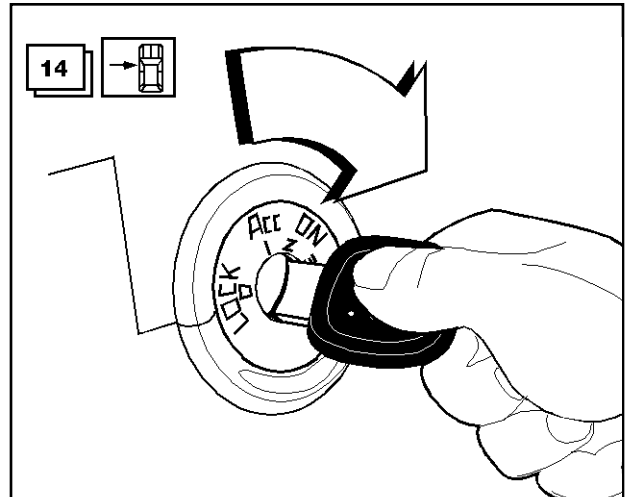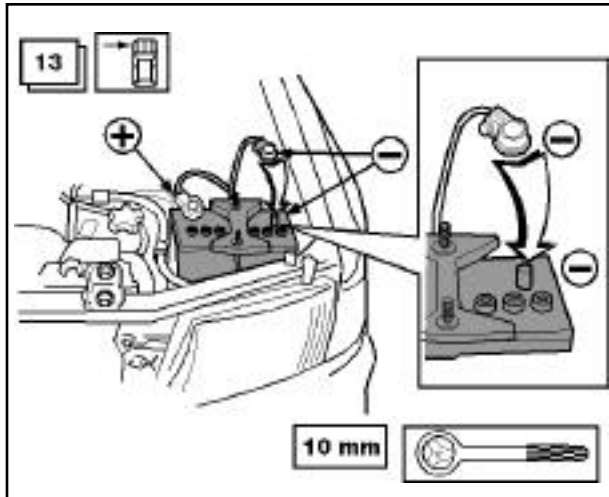

It is recommended that this product be installed by a trained Subaru Technician at your local Subaru dealer. If you intend to install this product and you feel that additional detailed instructions might be of benefit to you, please contact your local Subaru dealer for more detailed installation instructions.

1. Disconnect the negative terminal from the battery using a 10mm wrench.
2. Grasp the base of the mirror and the mirror itself rotate either left or right 90 degrees and slide the mirror off the mount. Discard the mirror.
3. Remove the spring clip using a slot screwdriver. Pry the old spring clip out and discard. Replace with the new spring clip provided in the kit.
4. Remove the overhead map light. Remove the Lens, clock or overhead console and screws, depending on vehicle type.
5. Find the prearranged 3 pin connector taped along the map light harness. Plug in the jumper cable provided with the kit.
6. On 2002MY Impreza remove the center sunshade using a phillips screwdriver.
7. Fish the jumper cable from the map light cavity towards the mirror mounting location.
8. Hold the EC Mirror Compass by the base, not the plastic pod and mirror portion on a 90 degree angle and slide it onto the window mounting base, then turn it 90 degrees to seat it into its final resting position.
9. Connect the 7-pin connector into the back side of the EC Mirror Compass.
10. Put the wire cover onto the wire. It snaps over the wire. Make sure there is enough wire from the base of the mirror to the 7-pin connector to allow the mirror to articulate to all extreme positions.
11. Snap the wire cover on the base of the mirror and feed the wire into the wire cover and push the end of the wire cover into the headliner. Verify that the cover is secure by moving mirror around. If not adjust the slack in the wire.
12. Re-install the items removed in steps 5 and 6.
13. Re-connect the battery cable.
14. Turn the ignition on.
15. Verify the indicator on the left hand side of the mirror is on. If it is not push the button on the extreme left hand side of the mirror.
16. In a well lit area, cover the sensor on the rear of the mirror and watch the mirror darken, uncover the sensor and the mirror will lighten again.