

SUBARU

INSTALLATION INSTRUCTIONS

REAR WINDOW DUST DEFLECTOR

APPLICABLE TO FORESTER
YEAR 2003


5IN108
18 DEC 01

PARTS LIST

4 Pan head screws 

4 Truss head screws 

1 Rear air deflector



2 Mounting Brackets



Left




Right

4 Rivnuts
(1/4" x 20)




2 Paper Templates




TOOLS AND SUPPLIES REQUIRED

Threaded insert installation tool.
(1/4" x 20).

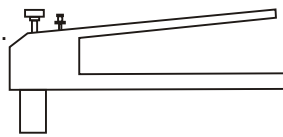

Hammer



#2 Phillips screwdriver




Water soluble marker or equivalent



Center punch



Drill with 1/8", 1/4" and 25/64" bits

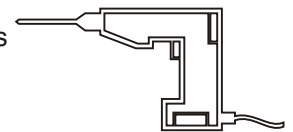

Tape Measure



Rust Inhibitor

(Duabert Noxrust X-124B,
Silicon or equivalent)



Deburr Tool




100% Isopropyl Alcohol




INSTALLATION


1.

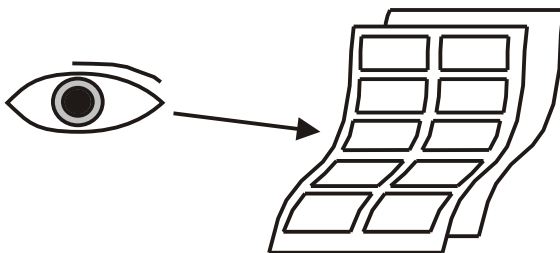

2.

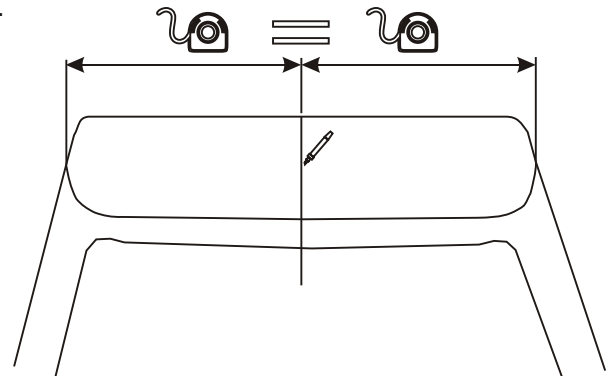


3.




Note: There is a
centerline mark
on the back surface
of the deflector

4.

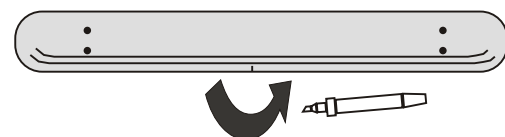


Transfer centerline mark to the
front surface of the deflector


5.

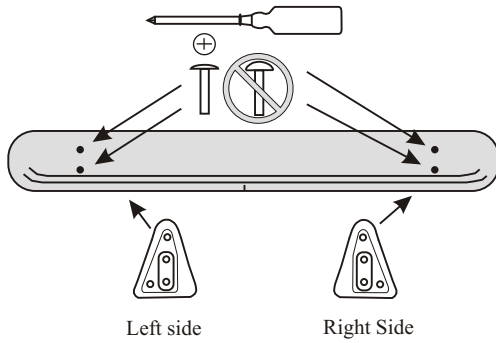


6.

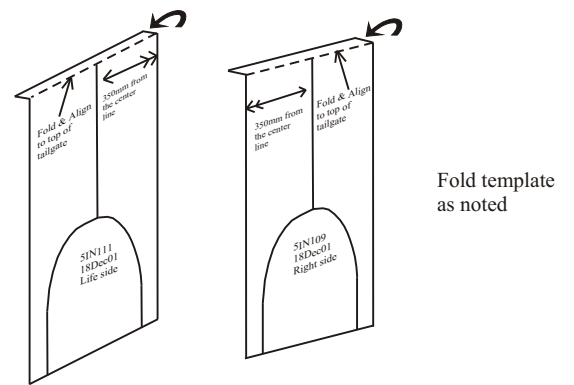


7.

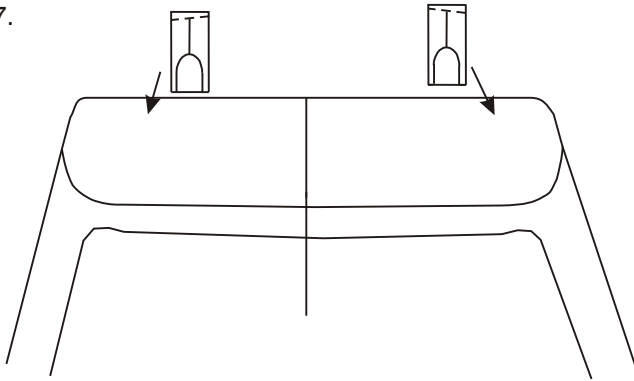


8.

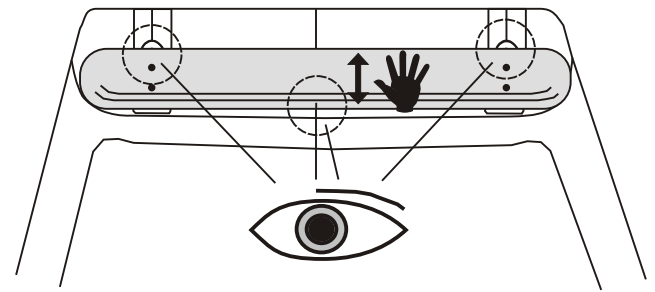


9.

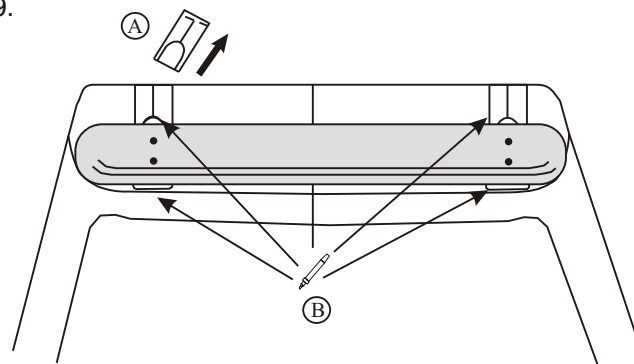


10.

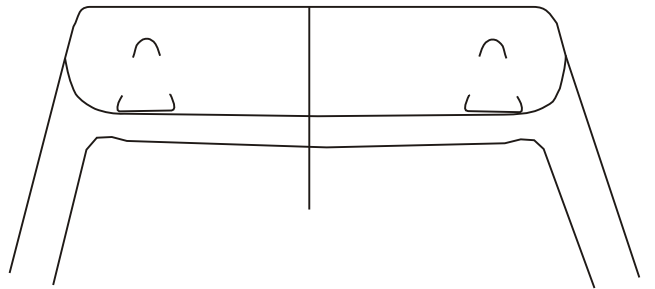


11.

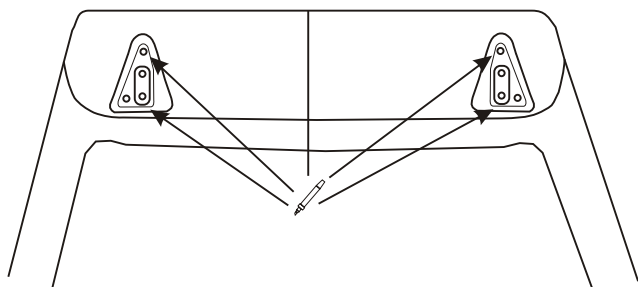


12.

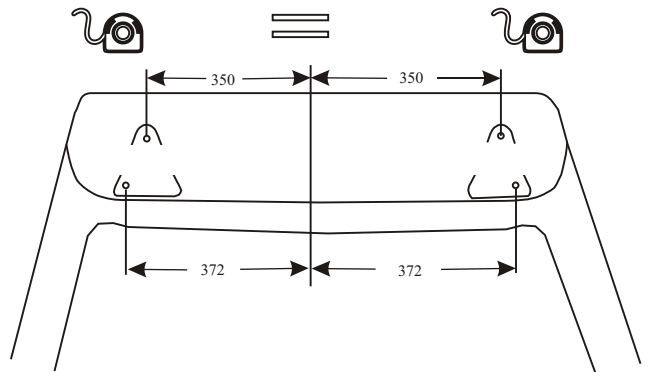


13.

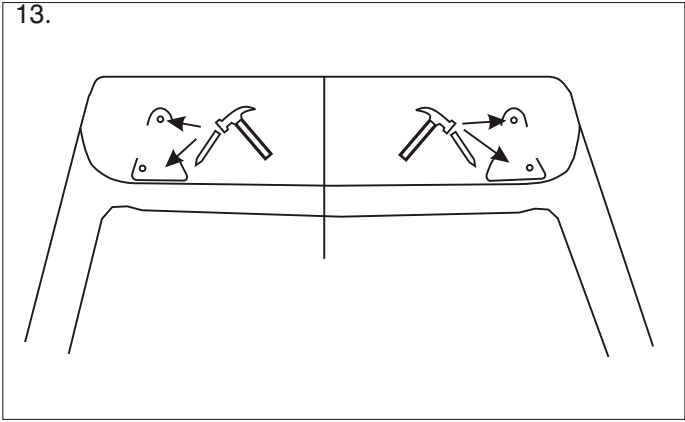


14.

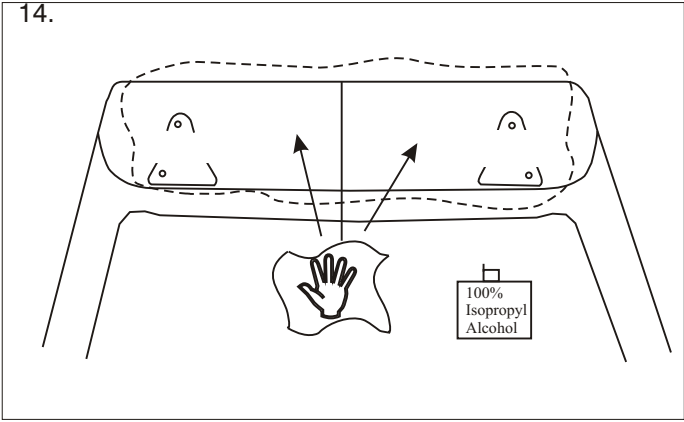


15.

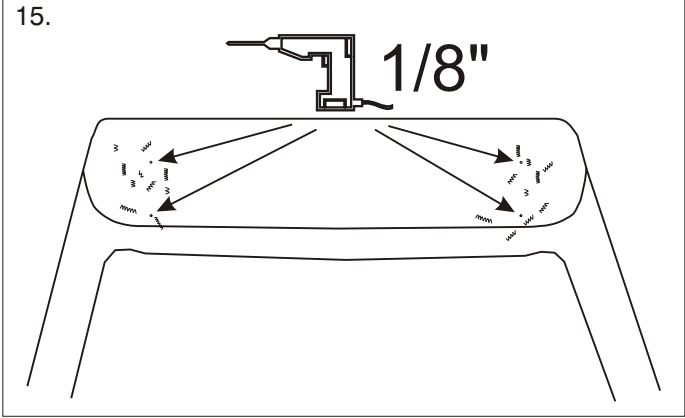


16.

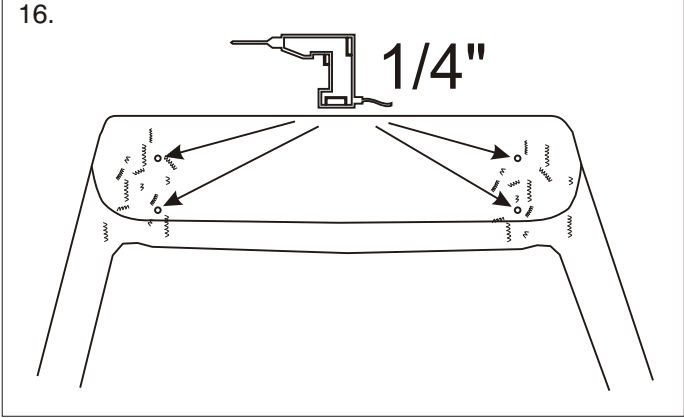


17.

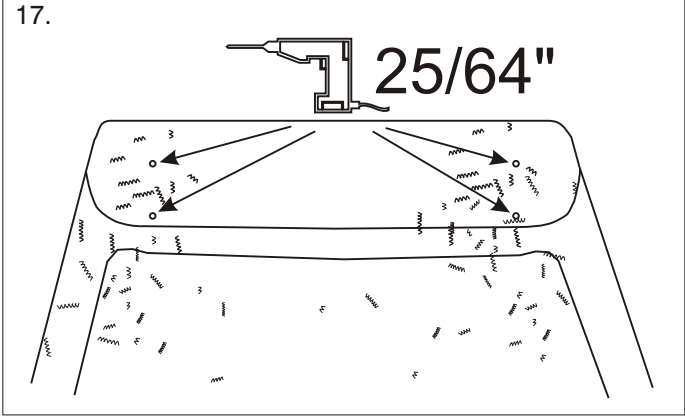


18.

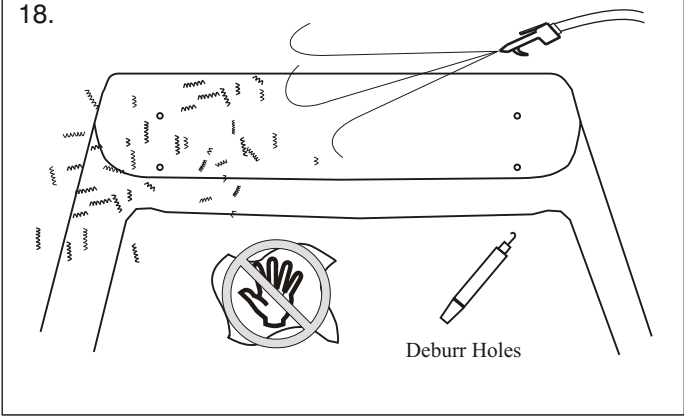


19.

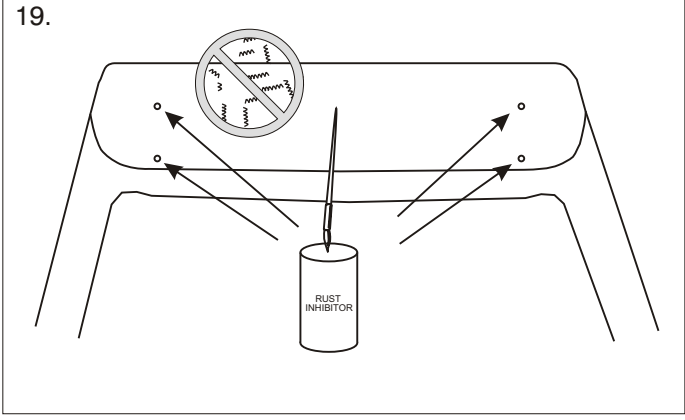


20.

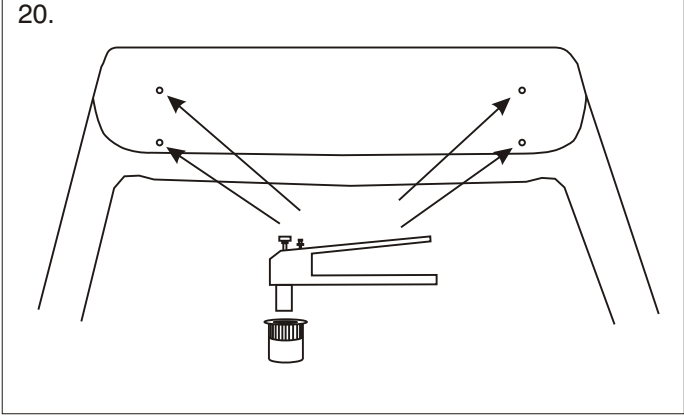

21.

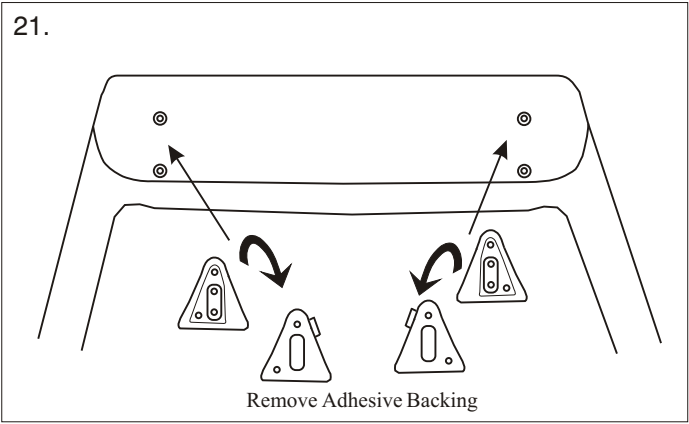


22.

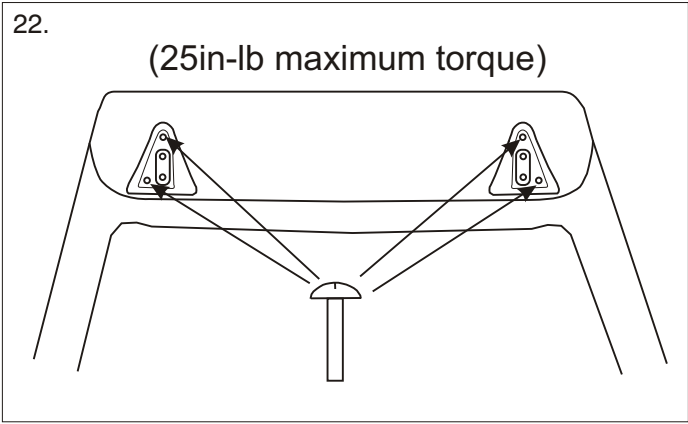

(25in-lb maximum torque)

23.

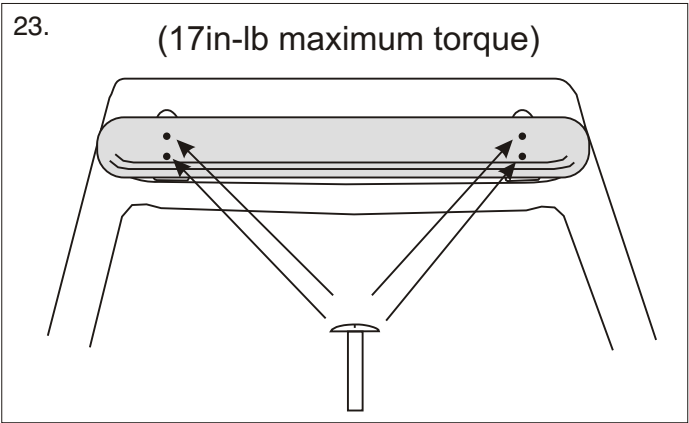

(17in-lb maximum torque)