



Installation Instructions for : SPEAKER KIT




Front Door




Rear Door

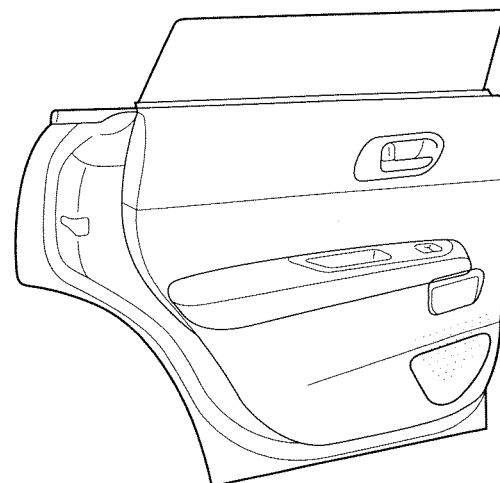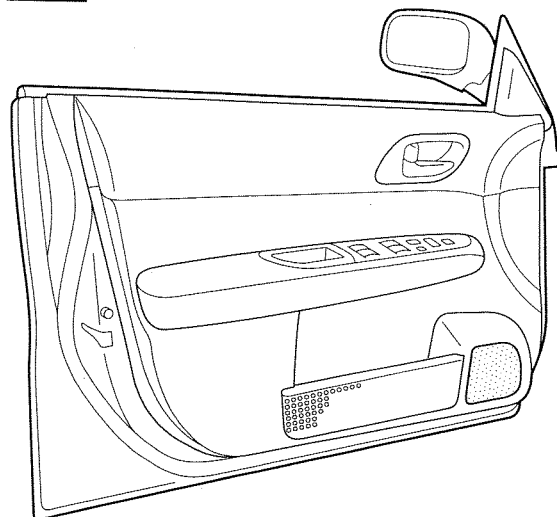

INSTALLATION
INSTRUCTION


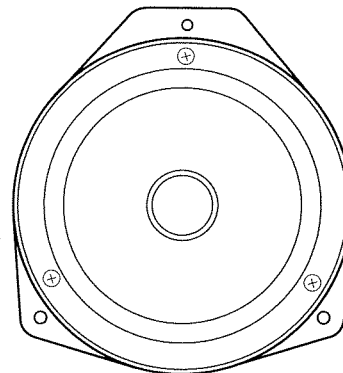


x 2

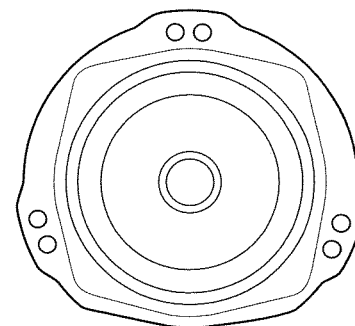

x 2

TAPE











SUBARU

FRONT DOOR

Part Number

H630 SSA000

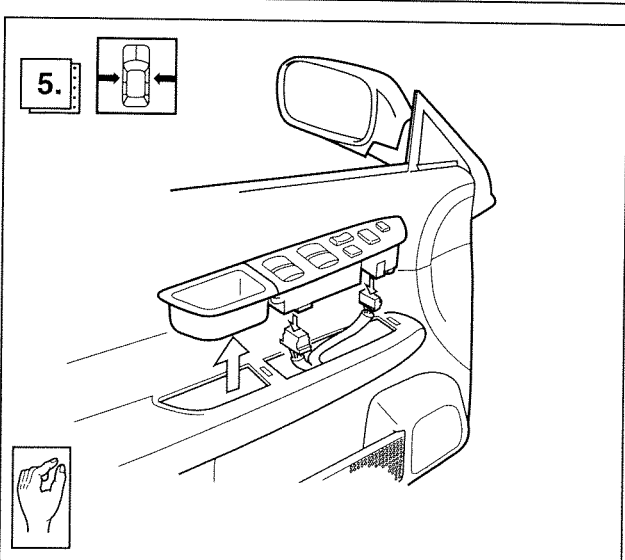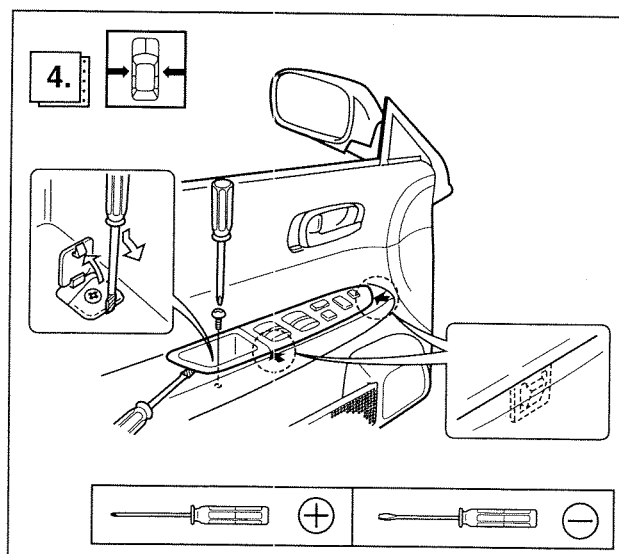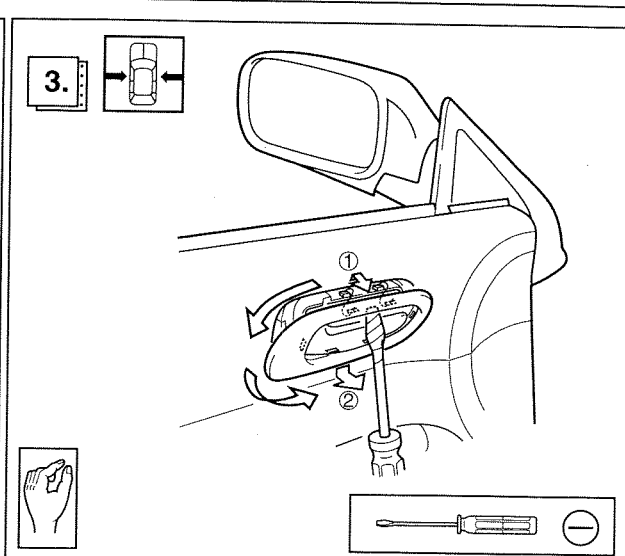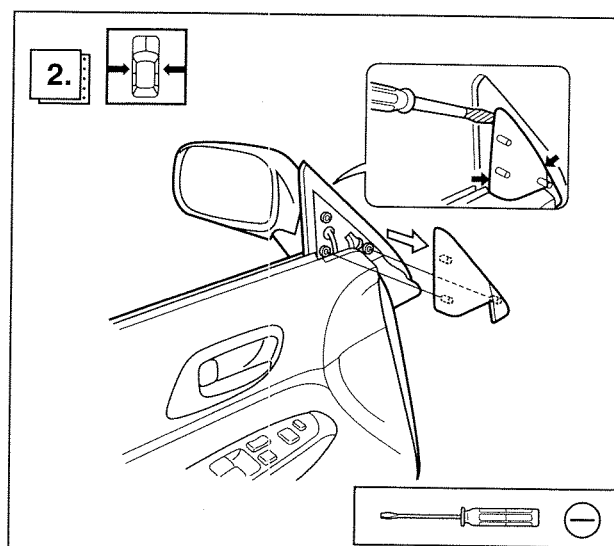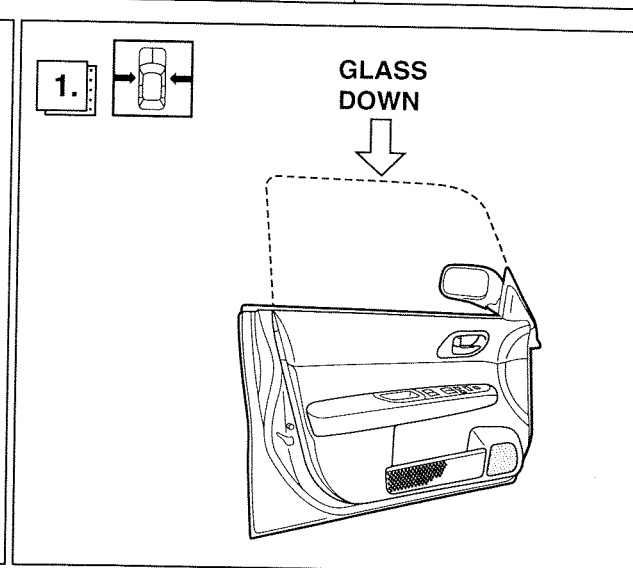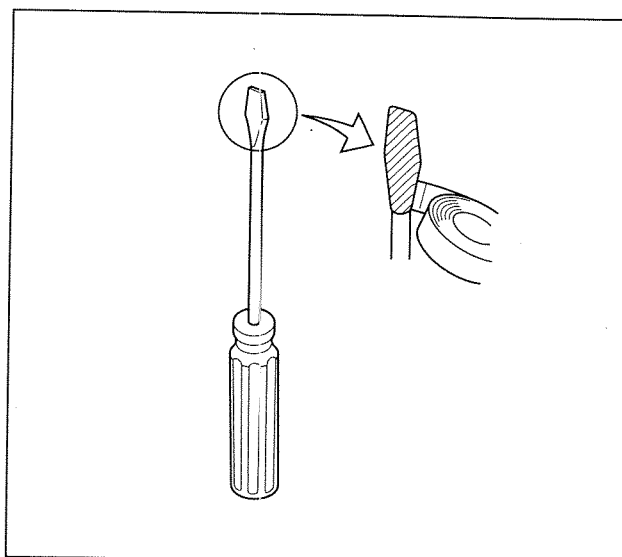

Part number
H630 SSA000

Date
2001/11/01

Subaru of America

Page
2/5




SUBARU

FRONT DOOR



Part Number

H630 SSA000


6.

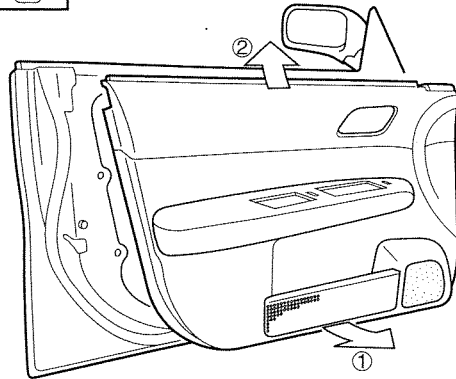

7.

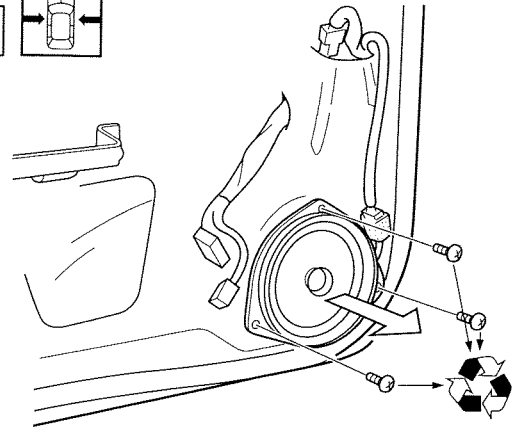

8.

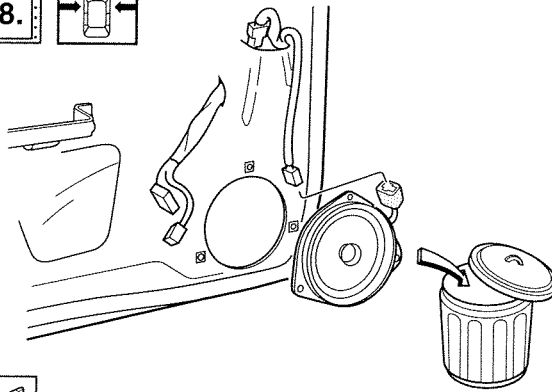

9.



INSTALL NEW SPEAKERS IN
REVERSE ORDER OF
DISASSEMBLY

Part number
H630 SSA000

Date
2001/11/01

Subaru of America

Page
3/5



SUBARU

REAR DOOR


Part Number

H630 SSA000



10.





GLASS
DOWN

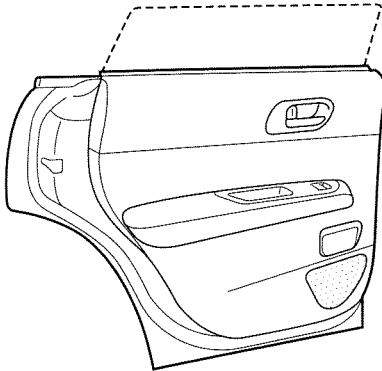


11.

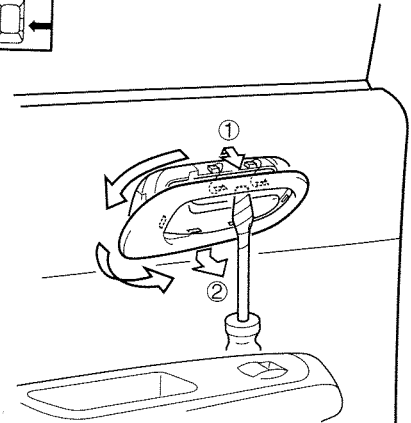


12.

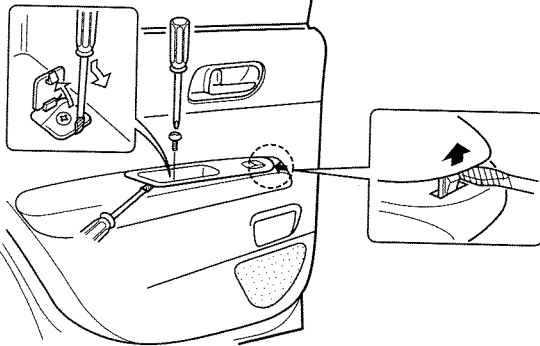



13.

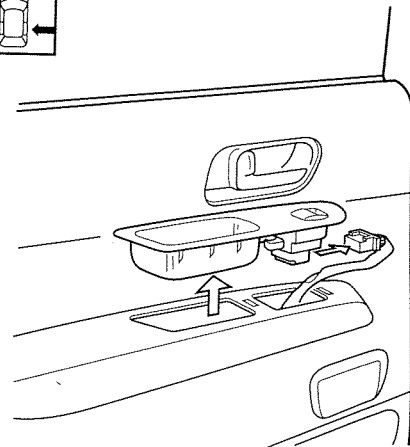

14.

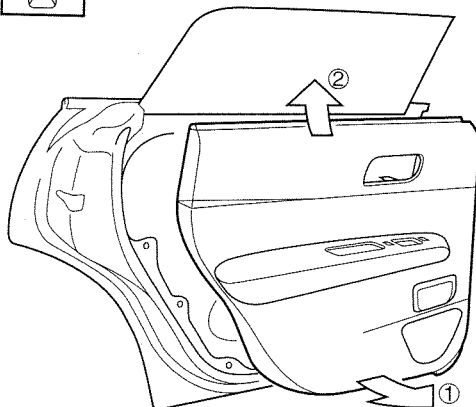

15.

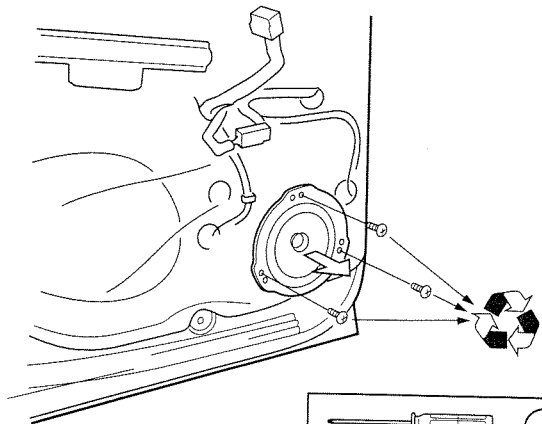

Part number
H630 SSA000

Date
2001/11/01

Subaru of America

Page
4/5




SUBARU

REAR DOOR

Part Number

H630 SSA000

16.

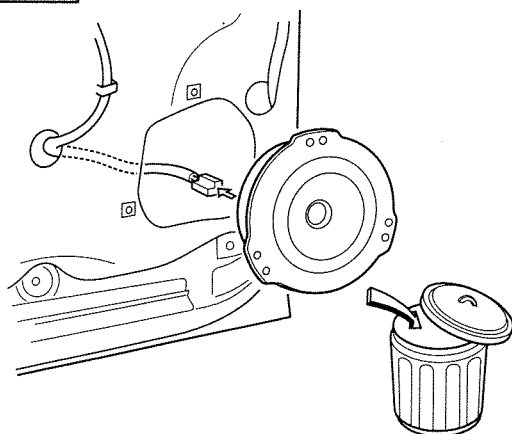

17.



INSTALL NEW SPEAKERS IN
REVERSE ORDER OF
DISASSEMBLY

H630SSA000 Upgraded Speaker Kit

Front Speakers

1. Wrap flat bladed screwdriver with electrical tape if no plastic non-marring blade tool is available.
2. Put down windows in the vehicle.
3. Remove trim piece from door as shown. Remove door handle trim bezel by placing tool at location 1 and lifting and pulling outward. Work tool around to position 2 and push down and outward. Then remove trim from door.
4. Using flat blade pry the cover open and expose the phillips screw. Using phillips screw driver remove 1 screw. While lifting bezel from rear carefully pry trim at locations indicated by arrows.
5. Disconnect all connectors from switches by pinching detent on connectors.
6. Pull door panel off door at lower end of panel near location 1. Then lift door panel off of door and place in a safe place.
7. Remove old speaker by disconnecting the connector and by removing three screws with a phillips screwdriver. Do not discard screws.
8. Install new speaker by re-installing the three screws previously removed and by reconnecting the connector to the speaker. Ensure the proper speaker is installed on the left and right side of the vehicle.
9. Reinstall all the hardware removed in the reverse order of disassembly and repeat steps on the other side of the vehicle.

Rear Speakers

10. Put down windows in the vehicle.
11. Remove trim piece from door as shown. Remove door handle trim bezel by placing tool at location 1 and lifting and pulling outward. Work tool around to position 2 and push down and outward. Then remove trim from door.
12. Using flat blade pry the cover open and expose the phillips screw. Using phillips screw driver remove 1 screw. While lifting bezel from rear carefully pry trim at location indicated by arrow.
13. Disconnect all connectors from switches by pinching detent on connectors.
14. Pull door panel off door at lower end of panel near location 1. Then lift door panel off of door and place in a safe place.
15. Remove old speaker by disconnecting the connector and by removing three screws with a phillips screwdriver. Do not discard screws.
16. Install new speaker by re-installing the three screws previously removed and by reconnecting the connector to the speaker. Ensure the proper speaker is installed on the left and right side of the vehicle.
17. Reinstall all the hardware removed in the reverse order of disassembly and repeat steps on the other side of the vehicle.