

SUBARU

Parts and Accessories INSTALLATION INSTRUCTIONS

BUMPER COVER FOR FORESTER E771SSA000

PRE-INSTALLATION CAUTIONS

1. Be careful not to scratch the vehicle body or rear bumper during installation.
2. Do not wash the vehicle for 24 hours following installation of bumper cover.
3. If the bumper cover requires cleaning after installation, wipe with a soft cloth or sponge and mild soap and wipe thoroughly with a dry cloth. Do not use gasoline, thinner, acid, alkali or other solvent based products.
4. Prior to installation clean dirt, oil and wax off the bumper with 100% alcohol.
5. If the temperature is below 60 degrees F (15 degrees C), heat the double sided tape and bumper surface to a temperature of 80 degrees F (27 degrees C).
6. The adhesive tape is very sticky and loses adhesion when removed and reapplied so caution is required when fitting in place.

(1) PREPARE REAR BUMPER

Clean any dirt, oil or wax from attaching area of bumper with a clean cloth and 100% alcohol, Figure 1.

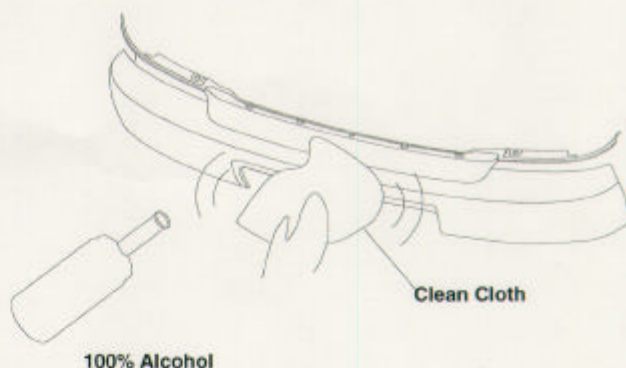


Figure 1

(2) CHECK COVER ALIGNMENT ON BUMPER

Check alignment for centering by assuring that the center mark on the cover matches with the tailgate striker, Figure 2.

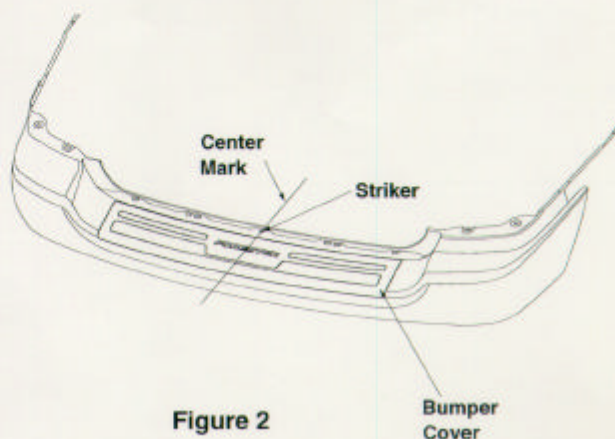


Figure 2

SUBARU

Parts and Accessories

INSTALLATION INSTRUCTIONS

BUMPER COVER FOR FORESTER E771SSA000

(3) INSTALL BUMPER COVER

Remove the parting paper from the adhesive tape on bottom of bumper cover, Figure 3.

When centered in position, press the cover onto the bumper firmly. Using your hands, press entire taped area to assure complete adhesion.

After attaching bumper cover to bumper, pressure must be applied along entire part for 10 secs. to ensure proper adhesion, Figure 4.

NOTE: Bumper cover should be installed on the bumper within 5 minutes of parting paper removal.

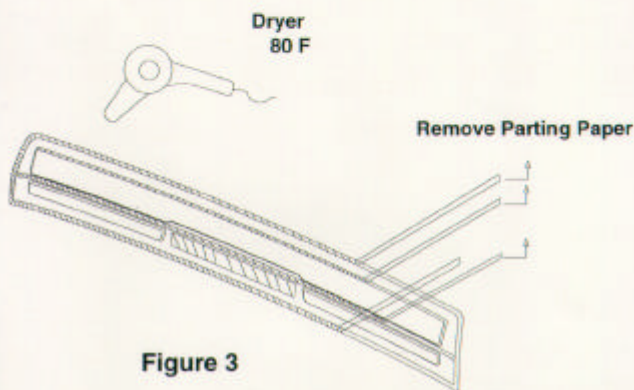


Figure 3

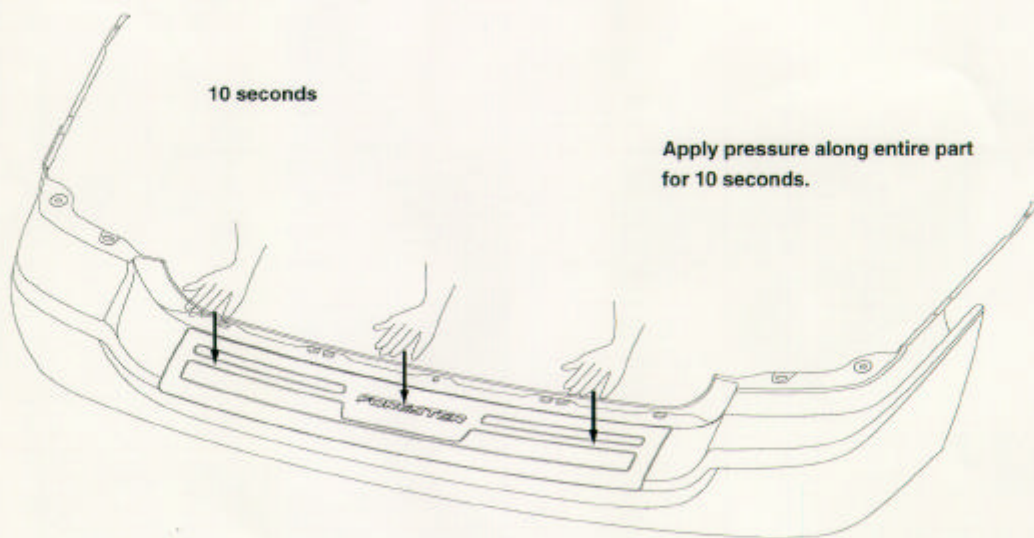


Figure 4